

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

**Defective images within this document are accurate representations of the original documents submitted by the applicant.**

**Defects in the images may include (but are not limited to):**

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

AMENDMENT OF THE CLAIMS

1. (currently amended) An image forming apparatus comprising a rotatable image carrier, and a charging means, an exposing means, a developing means, a transferring means and a cleaning means, which are sequentially arranged in the vicinity of the rotatable image carrier, wherein a toner ~~remained~~ remaining on the surface of the rotatable image carrier is removed by the cleaning means after going through the developing means and the transferring means;

said cleaning means has an elastic blade, which is supported by a supporting member and is contacted with the surface of the image carrier at a contact pressure of not less than 8 g/cm and not more than 20 g/cm in terms of a linear pressure, and a press-contact angle of the elastic blade is not less than 12° and not more than 30°; and

A<sub>1</sub> said image carrier is an organic photosensitive material comprising a conductive substrate, and a photosensitive layer made of a binder resin containing at least an electric charge generating material and an electric charge transferring material, which is formed on the conductive substrate;

wherein the image carrier is an electrophotosensitive material comprising a conductive substrate, and a single-layer type photosensitive layer made of a binder resin containing at least an electric charge generating material, an electron transferring material and a hole transferring material, which is formed on the conductive substrate, and the solid content of the binder resin is not less than 50% by weight and not more than 70% by weight based on the whole solid content in the photosensitive layer and, moreover, a pair of paper transporting rollers are arranged on a path for transporting a transfer paper from a paper feeding portion to the transferring means, and a paper transporting roller at the

side to be transferred among a pair of paper transporting rollers has a cleaning means for removing paper powders adsorbed on the paper transporting roller at the side of the surface to be transferred from the roller.

2. (original) The image forming apparatus according to claim 1, wherein the linear pressure is not less than 10 g/cm and not more than 18 g/cm.


3. (original) The image forming apparatus according to claim 1, wherein the linear pressure is not less than 10 g/cm and not more than 18 g/cm and the press-contact angle is not less than 15° and not more than 25°.

4. (cancelled)


5. (cancelled)

6. (cancelled)

7. (currently amended) The image forming apparatus according to claim 5 ~~1~~, wherein, in the electrophotosensitive material, the binder resin ~~of an outermost layer~~ in the photosensitive layer is a copolymerized polycarbonate resin having a repeating structural unit represented by the general formula [1]:

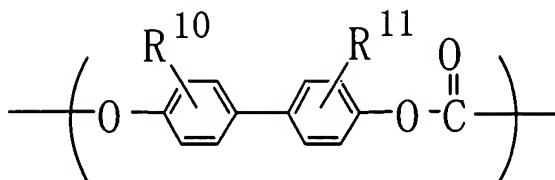


wherein  $\text{R}^{10}$ , and  $\text{R}^{11}$  are the same or different and represent a hydrogen atom or an alkyl group having 1 to 3 carbon atoms, and a repeating structural unit represented by the general formula [2]:

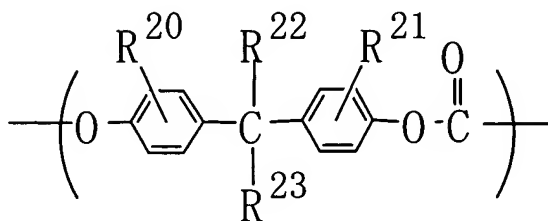


wherein  $\text{R}^{20}$ , and  $\text{R}^{21}$  are the same or different and represent a hydrogen atom, an alkyl group having 1 to 3 carbon atoms, or a phenyl group, and  $\text{R}^{22}$  and  $\text{R}^{23}$  are the same or different and represent an alkyl group having 1 to 3 carbon atoms, a phenyl group, or a cycloalkylidene group which may form a ring to have a substituent.

8. (currently amended) The image forming apparatus according to claim 6 1, wherein, in the electrophotosensitive material, the binder resin ~~of the outermost layer~~ in the photosensitive layer is a copolymerized polycarbonate resin having a repeating structural unit represented by the general formula [1]:

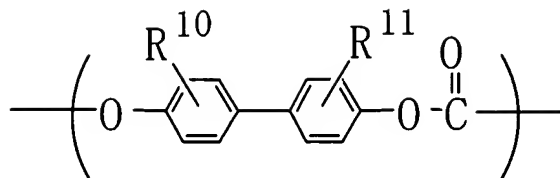


wherein R<sup>10</sup> and R<sup>11</sup> are the same or different and represent a hydrogen atom or an alkyl group having 1 to 3 carbon atoms.

9. (currently amended) The image forming apparatus according to claim 5 1, wherein, in the electrophotosensitive material, the binder resin ~~of the outermost layer~~ in the photosensitive layer is a copolymerized polycarbonate resin having a repeating structural unit represented by the general formula [1]:

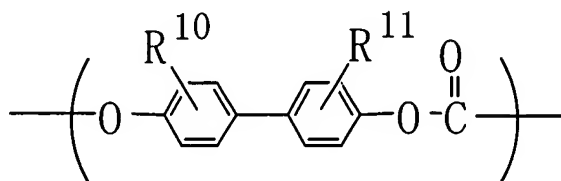

wherein R<sup>10</sup> and R<sup>11</sup> are the same or different and represent a hydrogen atom or an alkyl group having 1 to 3 carbon atoms,


a repeating structural unit represented by the general formula [2]:

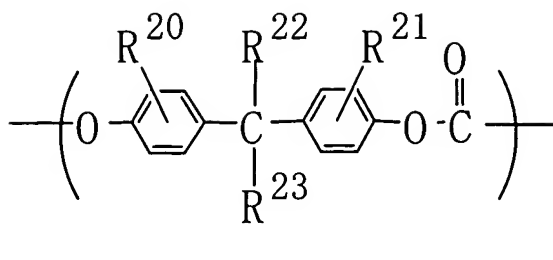

wherein  $\text{R}^{20}$  and  $\text{R}^{21}$  are the same or different and represent a hydrogen atom, an alkyl group having 1 to 3 carbon atoms, or a phenyl group, and  $\text{R}^{22}$  and  $\text{R}^{23}$  are the same or different and represent an alkyl group having 1 to 3 carbon atoms, a phenyl group, or a cycloalkylidene group which may form a ring to have a substituent,


and a repeating structural unit represented by the general formula [3]:

A1  
cont.

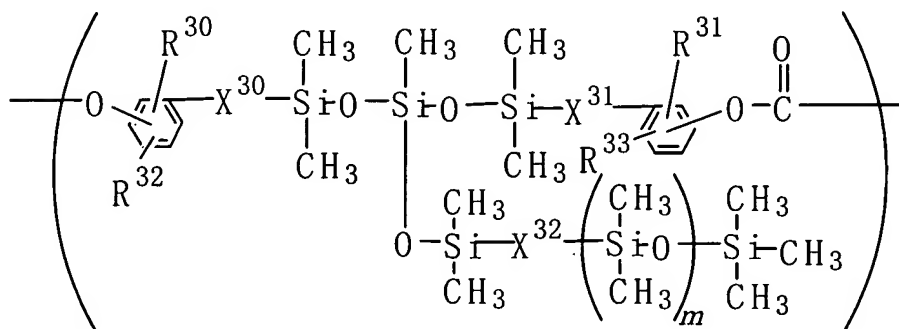


wherein  $\text{X}^{30}$ ,  $\text{X}^{31}$  and  $\text{X}^{32}$  are the same or different and represent  $-(\text{CH}_2)_n-$  (n represents an integer of 1 to 6),  $\text{R}^{30}$ ,  $\text{R}^{31}$ ,  $\text{R}^{32}$  and  $\text{R}^{33}$  are the same or different and represent a hydrogen atom, a phenyl group, or an alkyl or alkoxy group having 1 to 3 carbon atoms, and m represents a numerical value of 0 to 200.

10. (currently amended) The image forming apparatus according to claim 6 1, wherein, in the electrophotosensitive material, the binder resin ~~of the outermost layer~~ in the photosensitive layer is a copolymerized polycarbonate resin having a repeating structural unit represented by the general formula [1];

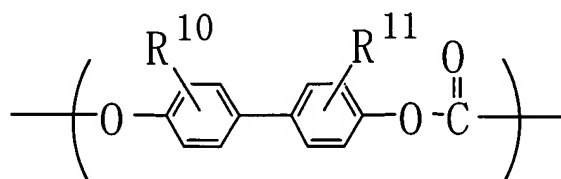

wherein R<sup>10</sup> and R<sup>11</sup> are the same or different and represent a hydrogen atom or an alkyl group having 1 to 3 carbon atoms,


a repeating structural unit represented by the general formula [2];

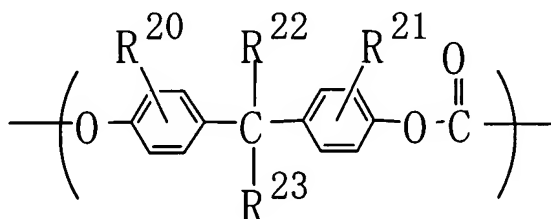

wherein R<sup>20</sup> and R<sup>21</sup> are the same or different and represent a hydrogen atom, an alkyl group having 1 to 3 carbon atoms, or a phenyl group, and R<sup>22</sup> and R<sup>23</sup> are the same or different and represent an alkyl group having 1 to 3 carbon atoms, a phenyl group, or a cycloalkylidene group which may form a ring to have a substituent,

and a repeating structural unit represented by the general formula [3];

A,  
cont.

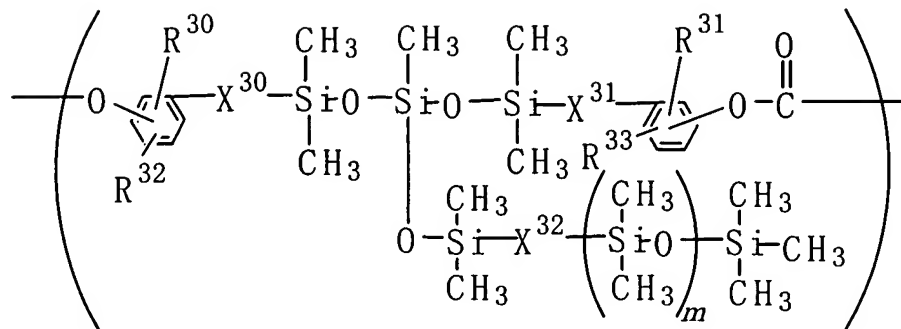

wherein  $X^{30}$ ,  $X^{31}$  and  $X^{32}$  are the same or different and represent  $-(CH_2)_n-$  ( $n$  represents an integer of 1 to 6),  $R^{30}$ ,  $R^{31}$ ,  $R^{32}$  and  $R^{33}$  are the same or different and represent a hydrogen atom, a phenyl group, or an alkyl or alkoxy group having 1 to 3 carbon atoms, and  $m$  represents a numerical value of 0 to 200.

A<sub>1</sub>  
cont.

11. (original) The image forming apparatus according to claim 7, wherein the content of the repeating structural unit represented by the general formula [1] in the copolymerized polycarbonate is within a range from 10 to 50 mol % based on the total amount of the binder resin of the outermost layer.

12. (original) The image forming apparatus according to claim 8, wherein the content of the repeating structural unit represented by the general formula [1] in the copolymerized polycarbonate is within a range from 10 to 50 mol % based on the total amount of the binder resin of the outermost layer.

13. (original) The image forming apparatus according to claim 9, wherein the content of the repeating structural unit represented by the general formula [1] in the copolymerized




polycarbonate is within a range from 10 to 50 mol % based on the total amount of the binder resin of the outermost layer.

14. (original) The image forming apparatus according to claim 10, wherein the content of the repeating structural unit represented by the general formula [1] in the copolymerized polycarbonate is within a range from 10 to 50 mol % based on the total amount of the binder resin of the outermost layer.

15. (currently amended) The image forming apparatus according to claim 7, further comprising a repeating structural unit represented by the general formula [3]:

A<sub>1</sub>  
cont.

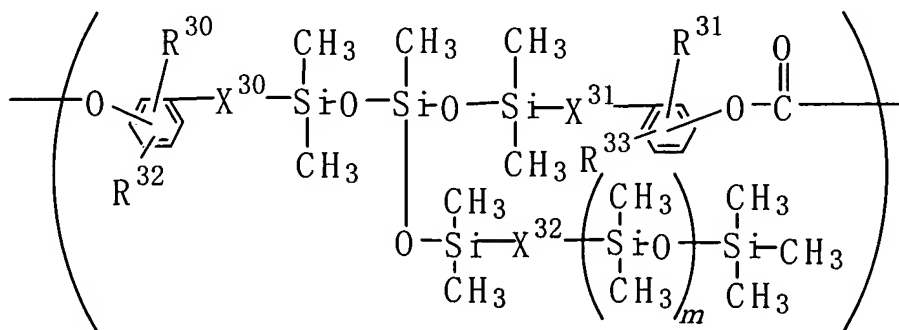


wherein  $X^{30}$ ,  $X^{31}$  and  $X^{32}$  are the same or different and represent  $-(CH_2)_n-$  ( $n$  represents an integer of 1 to 6),  $R^{30}$ ,  $R^{31}$ ,  $R^{32}$  and  $R^{33}$  are the same or different and represent a hydrogen atom, a phenyl group, or an alkyl or alkoxy group having 1 to 3 carbon atoms, and  $m$  represents a numerical value of 0 to 200, and

wherein the content of the repeating structural unit represented by the general formula [3] in the copolymerized polycarbonate is within a range from 0.05 to 10 mol % based on the total amount of the binder resin of the outermost layer.


16. (original) The image forming apparatus according to claim 9, wherein the content of the repeating structural unit represented by the general formula [3] in the copolymerized polycarbonate is within a range from 0.05 to 10 mol % based on the total amount of the binder resin of the outermost layer.

17. (currently amended) The image forming apparatus according to claim 5 1, wherein, in the electrophotosensitive material as the image carrier, the binder resin ~~of the outermost layer~~ contains, as a main component, a polycarbonate resin having a repeating structural unit represented by the general formula [4]:

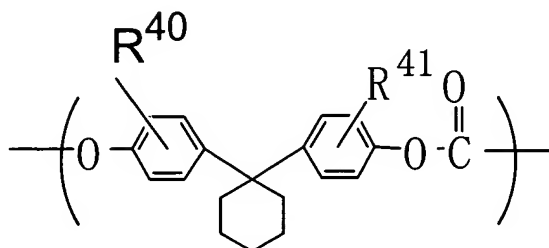

wherein R<sup>40</sup> and R<sup>41</sup> are the same or different and represent a hydrogen atom or an alkyl group having 1 to 3 carbon atoms, provided that R<sup>40</sup> and R<sup>41</sup> are not simultaneously hydrogen atoms.

18. (currently amended) The image forming apparatus according to claim 6 1, wherein, in the electrophotosensitive material as the image carrier, the binder resin ~~of the outermost layer~~ contains, as a main component, a polycarbonate resin having the repeating structural unit represented by the general formula [4]:

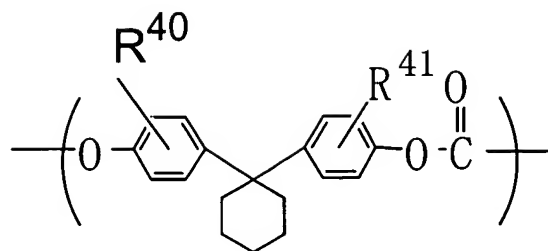

wherein R<sup>40</sup> and R<sup>41</sup> are the same or different and represent a hydrogen atom or an alkyl group having 1 to 3 carbon atoms, provided that R<sup>40</sup> and R<sup>41</sup> are not simultaneously hydrogen atoms.

A<sub>1</sub>  
cont.

19. (currently amended) The image forming apparatus according to claim 5 1, wherein the image carrier is a cylindrical drum having a single-layer type photosensitive layer and the wear resistance [(Wear amount,  $\mu\text{m}$ )  $\times$  (Drum diameter, mm)]/[(Drum driving time, min)  $\times$  (Drum peripheral speed, mm/sec)] of the single-layer type photosensitive layer is not more than 0.0004.

20. (currently amended) The image forming apparatus according to claim 6 1, wherein the image carrier is a cylindrical drum having a single-layer type photosensitive layer and the wear resistance [(Wear amount,  $\mu\text{m}$ )  $\times$  (Drum diameter, mm)]/[(Drum driving time, min)  $\times$  (Drum peripheral speed, mm/sec)] of the single-layer type photosensitive layer is not more than 0.0004.